

# COMPACT NX5 TELECOM SERIES

MULTIFUNCTIONAL TEST GENERATOR FOR CONDUCTED TRANSIENTS (EFT/BURST, SURGE, TELECOM-SURGE & POWER FAIL) UP TO 5.5 KV



## FOR TESTS ACCORDING TO ...

- > IEC 61000-4-4
- > IEC 61000-4-5
- > IEC 61000-4-8
- > IEC 61000-4-9
- > IEC 61000-4-11
- > IEC 61000-4-29
- > EN 61000-6-1
- > EN 61000-6-2
- > EN 300329
- > EN 300340
- > EN 300342-1
- > EN 300386 V1.3.2
- > EN 301489-1
- > EN 301489-17
- > EN 301489-24
- > EN 301489-7
- > FCC 97-270 (part 68)
- > ITU-T K.21
- > ITU-T K.20
- > ITU-T K.41

## COMPACT NX5 - COMPACT TESTER FOR EFT/BURST, SURGE, TELECOM-SURGE AND POWERFAIL









The compact Next Generation NX5 is the most versatile tester to address transient and power fail requirements for both international and commercial standards.

Featuring an easy-to-use color touch screen, the compact NX5 bspt series provides an economical solution for full-compliance testing and CE Marking. Its internal single-phase Coupling/Decoupling Network (CDN) can be extended for testing three-phase EUTs by means of an automatically controlled external CDN up to 200 A per phase. EM TEST supplies a large range of accessories for various applications such as magnetic field tests and more.

### HIGHLIGHTS

- > **Smallest compact generator with 7" touch screen**
- > **Burst 5.5 kV, Surge 5.0 kV and Power Fail**
- > **TSurge module IEC/EN 61000-4-5 up to 5 kV**
- > **Built-in single phase CDN up to 400 V/32 A**
- > **Separate key for START/STOP operation with LED**
- > **Manual front panel operation with setup pictures**

### APPLICATION AREAS

- |   |  |
|---|--|
|  INDUSTRY    |  COMPONENTS       |
|  MEDICAL     |  BROADCAST        |
|  RESIDENTIAL |  RENEWABLE ENERGY |
|  TELECOM     |  AUTOMOTIVE       |

**TECHNICAL DETAILS**

**BENEFITS**

**ALL IN ONE - ALL YOU NEED FOR YOUR TESTS**

The compact NX5 bspt series is a standalone generator which includes everything necessary to perform fully compliant tests. With separate power mains supply inputs, it allows the utilization of different EUT supply voltages for maximum flexibility.

The NX5 can be operated manually from the intuitive front touch screen or remotely via its built-in Ethernet or optical interface. Failure inputs allow control of an ongoing test sequence based on the state of the EUT. Monitoring outputs (BNC) offer easy signal verification and measurements. For enhanced safety requirements, features like interlock and a warning lamp are available.

NX5 is the first generator that recognizes the connected EUT power configuration. Only coupling selections to active lines are enabled. Non existing lines will be disabled from the menu settings. Pre-programmed routines with common Test Standards allow maximum user convenience. Quick Start Test routines where parameters can be changed during susceptibility level evaluation are also available.

**OPERATION**

**EASY TO OPERATE**

An innovative color touch screen with intuitive menu structure and defined keys for Start / Stop / Pause, indicated by LED bars, enables the user to program test routines quickly and accurately. The touch screen and knob allow fast control of all test parameters of the programmed routine, ensuring that test procedures are simplified and confidence is high that every step is carried out correctly.



**SOFTWARE**

**IEC.CONTROL SOFTWARE FOR CONTROL AND DOCUMENTATION**

Outstanding user convenience, clearly structured windows and operation features, EM TEST's comprehensive standards library along with the flexibility to easily generate user specific test sequences are the main features of iec.control software. The software will be automatically configured in accordance with the connected EM TEST generators. Extensive reporting capabilities help the user to create test reports that meet international requirements.

The iec.control is supported by Windows 7, Windows 8 and Windows 10. Remote control is achieved either via Ethernet or optical interface with USB connector at the PC side.

The iec.control supports various interfaces for the communication to external measuring devices.



**OTHER MODELS**

**UCS 500N7 - COMPACT TESTERS UP TO 7 KV**

Ultra-compact testers for EFT/burst, Surge, Power Fail, Telecom Surge and Ringwave with voltage capability up to 7 kV.

## TECHNICAL DETAILS

### AUXILIARY DEVICES

#### **COUPLING NX5 - 3PHASE COUPLING/DECOUPLING NETWORKS FOR BURST AND SURGE**

EM TEST offers a range of fully automatic 3-phase coupling/decoupling networks for burst and surge to extend the test capability for three-phase EUTs. The networks have a rated current of up to 200 A.

#### **VARIAC NX 1-260-16 - MOTORISED VARIAC FOR VOLTAGE VARIATION**

A motorized variac is offered as an alternative to the tapped autotransformers for voltage dips/interruptions and voltage variation tests as per IEC/EN 61000-4-11. The motorized variac can also be used for automated magnetic field tests.

#### **V 4780 - TAPPED VOLTAGE TRANSFORMER FOR VOLTAGE DIPS**

The TVT V 4780 tapped autotransformer is designed to supply the required voltages as per IEC/EN 61000-4-11 to perform voltage dips.

#### **V 4780S2 - TAPPED STEP TRANSFORMER AUTOMATIC FOR VOLTAGE DIPS**

The V 4780S2 is an automatic tapped auto transformer, designed to supply the required voltages as per IEC/EN 61000-4-11 to perform voltage dips and interruptions. Compared to the manually operated V 4780, the V 4780S2 model offers automatic change of taps according to the selected voltage level.

#### **CNV 504/508 N- AND T-SERIES - SURGE COUPLING/DECOUPLING NETWORKS FOR SIGNAL/DATA LINES**

CNV 504/508 N- and T-series coupling/decoupling networks are available to perform surge tests on I/O lines, signal/data lines and telecom lines as per IEC/EN 61000-4-5 Ed 3.0

### ACCESSORIES

#### **MS 100N - MAGNETIC FIELD COIL FOR POWER-FREQUENCY AND PULSED MAGNETIC FIELDS**

The MS 100N is a 1m x 1m magnetic field coil as specified in IEC/EN 61000-4-8 and IEC/EN 61000-4-9. Its design allows easy moving of the coil. The field coil is adjustable in height and allows for 360degree rotation.

To generate power-frequency magnetic fields in the lower range the current transformer MFT 30 is used while high-field strength above 100 A/m up to 1000 A/m requires the MFT 100 current transformer.

#### **CCI - CAPACITIVE COUPLING CLAMP**

Capacitive coupling clamp as per specification IEC/EN 61000-4-4.

#### **ITP - IMMUNITY TEST PROBES**

ITP is a tool being used for development test. It consists of a variety of electrical field probes. The probes allow to locate weak points within a system or on a PCB. The burst pulse is used to generate the disturbance signal.

#### **PVF BKIT 1 - VERIFICATION KIT FOR EFT/BURST PULSES**

As per IEC/EN 61000-4-4 Ed 3.0 the characteristic of the burst generator needs to be verified with two different loads, 50 ohm and 1,000 ohm. EM TEST offers a calibration kit consisting of the two loads and an adapter to verify the pulses at the EUT output.

#### **CCI PVKIT 1 - VERIFICATION KIT FOR CAPACITIVE COUPLING CLAMP**

The IEC/EN 61000-4-4 Ed 3.0 standard recommends the calibration of the capacitive coupling clamp into a 50 ohm coaxial load.

The capacitive coupling clamp (CCI or HFK) is connected to the 50 ohm output of the EFT generator. A flexible insulated plate inside the HFK is connected to a coaxial 50 ohm load resistor for verifying the EFT/Burst wave of the capacitive coupling clamp.

## TECHNICAL DETAILS

## ELECTRICAL FAST TRANSIENTS

BURST MODULE	
	As per IEC/EN 61000-4-4 and EN 61000-6-1, -6-2
Test voltage	200 V - 5,500 V $\pm$ 10 %; 100 V - 2,750 V $\pm$ 10 % into 50 ohm
Pulse shape	5/50 ns into 50 ohm and 1,000 ohm
Rise time tr	5 ns $\pm$ 30 % into 50 ohm; 5 ns $\pm$ 30 % into 1,000 ohm
Pulse width td	50 ns $\pm$ 30 % into 50 ohm; 50 ns -15/+100 ns into 1,000 ohm
Source impedance	50 ohm
Polarity	Positive/negative

TRIGGER CIRCUIT	
Trigger of bursts	Automatic, manual, external
Synchronization	0° - 360°, resolution 1° (16 - 500 Hz)
Burst duration (td)	td = 0.10 ms - 9,999 ms
Repetition rate (tr)	tr = 10 ms - 9,999 ms
Spike frequency	f = 1 Hz - 1,000 kHz
Test duration	T = 0:01 min - 99:59 min T > 99:59 min --> endless

OUTPUTS	
Direct	Via 50 ohm coaxial SHV connector
Coupling mode	L, N, PE; all combinations
EUT supply	AC: 300 V / 400 V, 50/60 Hz DC: 300 V / 400 V, Current: 16 A / 32 A
CRO trigger	5 V trigger signal for oscilloscope

## ELECTRICAL FAST TRANSIENTS

TEST ROUTINES	
Quick Start	On-line adjustable parameters, easy-to-use
Standard Test routines	As per IEC/EN 61000-4-4, Levels 1 - 4 As per IEC/EN 61000-6-1, -6-2 As per ECE R-10 Rev5
Extended Test routines	Change voltage after T, Frequency sweep within one burst, Frequency sweep with constant number of pulses, Frequency sweep with constant burst duration, Synchronous burst release, Random burst release

OPTIONS	
CCI	Capacitive coupling clamp as per IEC/EN 61000-4-4
CCI PVKIT 1	Adapter set for capacitive coupling clamp calibration included: - Transducer plate as per IEC/EN 61000-4-4 Ed 3.0, - Support for positioning the PVF 50 on 100 mm height as the capacitive coupling clamp, - PVF AD 3 to match the Transducer plate to the PVF 50
PVF 50	100:1 divider, 50 ohm, SHV connector
PVF 1000	500:1 divider, 1,000 ohm, SHV connector
PVF BKIT 1	Kit for burst pulse verification consisting of PVF 50, PVF 1000 and adapter for EUT port in a plastic case for storage
PVF AD 1	Adapter to match PVF 50 load resistor to the EUT supply of NX-series coupling network, 3-phase coupling network
ITP	Immunity test probes (electrical field generation)
ITP/H	Immunity test probe (magnetic field generation)

## TECHNICAL DETAILS

## COMBINATION WAVE / SURGE

SURGE MODULE	
	As per IEC/EN 61000-4-5 and IEC/EN 61000-6-1, -6-2
Voltage (o.c.)	160 V - 5,000 V $\pm$ 10 %
Pulse front time	1.2 $\mu$ s $\pm$ 30 %
Pulse duration	50 $\mu$ s $\pm$ 20 %
Current (s.c.)	Max. 2,500 A $\pm$ 10 %
Pulse front time	8 $\mu$ s $\pm$ 20 %
Pulse time to half value	20 $\mu$ s $\pm$ 20 %
Polarity	Positive/negative/alternating

TRIGGER CIRCUIT	
Release of pulses	Automatic, manual, external
Synchronization	0° - 360°, resolution 1°
Repetition rate	max. 1 Hz (1 s - 9,999 s)
Event counter	1 - 99,999, selectable

OUTPUTS	
Direct	Via HV connectors for external coupling networks
Coupling mode	Line to line Line(s) to ground
EUT supply	AC: 300 V / 400 V, 50/60 Hz DC: 300 V / 400 V, Current: 16 A / 32 A
CRO trigger	5 V trigger signal for oscilloscope

MEASUREMENTS	
CRO $\hat{U}$ -monitor	10 V <sub>p</sub> at 5,000 V
CRO $\hat{I}$ -monitor	10 V <sub>p</sub> at 2,500 A
Peak voltage	5,000 V in the touch display
Peak current	2,500 A in the touch display
Overcurrent protection	Breaks the Surge test when the surge current is over the limit, Limiter for differential mode, Limiter for common mode
EUT current	RMS current, Range 50 A, $\leq$ $\pm$ 5 %
EUT overcurrent protection	Breaks the test when the EUT current is over the limit,

## COMBINATION WAVE / SURGE

TEST ROUTINES	
Quick Start	One-line adjustable parameters, easy-to-use
Standard Test routines	As per IEC/EN 61000-4-5, As per IEC/EN 61000-6-1, As per IEC/EN 61000-6-2, Manual Standard Test routine
Extended Test routines	Voltage iteration after n pulses, Angle iteration stepwise Phase angle randomiteration, Change coupling after n pulses, Change phase angle after n pulses
Pulsed Magnetic Field	as per IEC/EN 61000-4-9 Test levels 100, 300, 1,000 A/m Test level continuously adjustable under Quick Start

OPTIONS	
CNV 504Nx	Coupling network for 4 signal/data lines as per IEC/EN 61000-4-5 Ed 3.0
CNV 508Nx	Coupling network for 8 signal/data lines as per IEC/EN 61000-4-5 Ed 3.0
CNV 504T5	Coupling/decoupling network for 4 unshielded symmetrical lines (communication lines) as per IEC/EN 61000-4-5 Ed 3.0 (fig. 10)
CNV 508T5	Coupling/decoupling network for 8 unshielded symmetrical lines (communication lines) as per IEC/EN 61000-4-5 Ed 3.0 (fig. 10)
CNI 508N2	Coupling/decoupling network for testing unshielded and shielded high-speed communication lines (Ethernet lines)
SPN 508N1	Surge protection network to reduce the surge voltage $<$ 10 V at the AE

## TECHNICAL DETAILS

## POWER FAIL, DIPS &amp; INTERRUPTIONS, VOLTAGE VARIATIONS

POWER FAIL MODULE	
As per	IEC/EN 61000-4-11, IEC/EN 61000-4-29 and IEC/EN 61000-6-1, -6-2
Channel PF1/PF2	AC voltage: max. 300 V / 400 V AC current: max. 16 A / 32 A DC voltage: max. 300 V / 400 V DC current: max. 16 A / 32 A
Frequency	16 Hz - 500 Hz and DC
Switching time	> 1 $\mu$ s < 5 $\mu$ s into a 100 ohm resistive load (SVP 100)
Inrush current	> 500 A
Protection	Both channels are protected against short-circuit conditions.

TRIGGER CIRCUIT	
Trigger of events	Automatic, manual, external
Synchronization	0° - 360°, resolution 1° (16 - 500 Hz)
Repetition rate	10 ms - 9,999 s
Event duration	10 $\mu$ s - 99,999 s
Event counter	1 - 99,999, selectable

OUTPUTS	
EUT terminals	L, N and PE
CRO trigger	5 V trigger signal for oscilloscope

MEASUREMENTS	
EUT voltage (rms)	In the touch screen
EUT current (rms)	In the touch screen
MON V	Measurement of the EUT voltage, built-in divider: 300 V: 42,5:1, 10 V = 425 Vpk, 400 V: 56,6:1, 10 V = 566 Vpk
MON I	Measurement of the EUT current, 16 A: 7 A/V; 10 V = 70 Apk, 32 A: 10 A/V; 10 V = 100 Apk

## POWER FAIL, DIPS &amp; INTERRUPTIONS, VOLTAGE VARIATIONS

TEST ROUTINES	
Quick Start	On-line adjustable parameters, easy-to-use
Standard Test routines	As per IEC/EN 61000-4-11 for AC supplies, As per IEC/EN 61000-4-29 for DC supplies, As per EN 61000-6-1, -6-2, Manual Standard Test routine
Extended Test routines	Voltage variation, control of an external variac, Phase angle iteration, Reduced time iteration, Angle inverse mode, Random by step and list
50/60 Hz magnetic field	As per IEC/EN 61000-4-8 Test levels 1, 3, 10 and 30 A/m with external current transformer MC 2630, Test levels 100, 300 and 1,000 A/m with external current transformer MC 26100

OPTIONS	
V 4780	Tapped autotransformer as per IEC/EN 61000-4-11 Ed 2.0
V 4780S2	Tapped autotransformer as per IEC/EN 61000-4-11 Ed 2.0 with automatic change of tap
variac NX 1-260-16	Motorized variac (0 - 250 V, 16 A)
variac NX 1-260-32	Motorized variac (0 - 250 V, 32 A)
MS 100N	Magnetic field coil, 1 m x 1 m, up to >1000 A/m
MC 2630	Current transformer for magnetic fields up to 30 A/m
MC 26100	Current transformer for magnetic fields up to 1,000 A/m
CA PFS	Calibration box for inrush current verification as per IEC/EN 61000-4-11
CA PFS-100R	100 ohm low inductive load resistor, for rise and fall time verification

## TECHNICAL DETAILS

## TELECOM SURGE

## TELECOM SURGE MODULE

Test voltage	160 V - 5,000 V $\pm$ 10 %
Energy storage capacitor	20 $\mu$ F
Polarity	Positive, negative, alternating

## TELECOM SURGE PULSES

## AS PER IEC/EN 61000-4-5

Front time	10 $\mu$ s $\pm$ 30 %
Pulse duration	700 $\mu$ s $\pm$ 20 %
Output current @25 ohm output	4 A - 125 A (short-circuit)
Front time	5 $\mu$ s $\pm$ 20 %
Pulse duration	320 $\mu$ s $\pm$ 20 %

## AS PER ITU AND ETSI RECOMMENDATIONS

Front time	10 $\mu$ s $\pm$ 30 %
Pulse duration	700 $\mu$ s $\pm$ 20 %

## AS PER FCC PART 68, PULSE B

Rise time	9 $\mu$ s $\pm$ 30 %
Pulse duration	720 $\mu$ s $\pm$ 20 %
Output current @25 ohm output	4 - 125 A (short-circuit)
Rise time	5 $\mu$ s $\pm$ 30 %
Pulse duration	320 $\mu$ s $\pm$ 20 %

## TELECOM SURGE

## TRIGGER CIRCUIT

Trigger of events	Automatic, manual, external
Repetition rate	max. 0.5 Hz (2 s - 999 s)
Event counter	1 - 99.999, selectable

## TELECOM OUTPUTS

As per IEC 61000-4-5 Ed 3.0	For 4-wire T1,T2,T3,T4 with 25 ohm each
As per ITU	For 2-wire T1/T2 with 25 ohm each
As per FCC part 68	For 2-wire T1/T2 with 25 ohm each
	For other requirements special output HV, COM and PE are available

## OPTIONS

CNV 504T5	Coupling/decoupling network for 4 unshielded symmetrical lines (communication lines) as per IEC/EN 61000-4-5 Ed 3.0 (fig. 10)
CNV 508T5	Coupling/decoupling network for 8 unshielded symmetrical lines (communication lines) as per IEC/EN 61000-4-5 Ed 3.0 (fig. 10)

## TECHNICAL DETAILS

## GENERAL DATA

## INTERFACES

Serial interface	2 x USB A for memory stick, 1 x USB B for service only, Opto - Link to USB for remote
Lan	Ethernet for remote
Analog output	0 - 10 VDC to control an external transformer
Sys.link	26 pin high density connector to control an external coupling network
Fail inputs	EUT monitoring via input (one each) EUT Monitor 1 EUT Monitor 2
Ext. Trigger	BNC Ext. Trigger IN pos slope 5 V
Ext. Sync Input	Differential input, 50 V - 690 VAC, 2 x 4 mm MC Safety connectors

## DIMENSIONS AND WEIGHT

16 A models	19"/6 HU, 500 mm deep, approx. 30.7 kg
32 A models	19"/9 HU, 500 mm deep, approx. 40 kg

## ENVIRONMENT

Temperature	10 °C to 35 °C
Humidity	30 % to 75 %, non condensing
Atmospheric pressure	86 kPa (860 mbar) to 106 kPa (1,060 mbar)

## MAINS

Supply voltage	85 V - 264 VAC
Frequency	50/60 Hz
Power	approx. 75 W
Fuses	115 V: 2 x 4 A slow blow, 230 V: 2 x 2 A slow blow

## SAFETY

Safety standard	IEC/EN 61010
Security circuit	Control input (24 VDC)
Warning lamp	Floating contact (max. 60 V/2 A)

## ACCESSORIES AND OPTIONS

## ACCESSORIES INCLUDED

Mains supply	Plug depends on the country of use
EUT supply	Plug depends on the country of use
EUT adapter	Socket depends on the country of use
	Operation manual, Calibration certificate, iec.control remote control software

## OPTIONS

coupling NX5	3-phase coupling/decoupling networks as per - IEC/EN 61000-4-4 and - IEC/EN 61000-4-5 up to 200 A per phase
iec.control	Remote control and documentation software, including standard test routines and reporting capabilities. included: UOC USB-Optolink Converter
UOC	USB-Optolink Converter, Optical Fibre cable, 5 m


## DEVICES

## AVAILABLE MODELS WITH TELECOM SURGE

Compact NX5 series	Compact simulator with
compact NX5 bspt-1-300-16	Burst, Surge, Power Fail, TSurge, 300 V, 16 A
compact NX5 bst-1-300-16	Burst, Surge, TSurge, 300 V, 16 A
compact NX5 st-1-300-16	Surge, TSurge, 300 V, 16 A
compact NX5 bspt-1-400-32	Burst, Surge, Power Fail, TSurge, 400 V, 32 A
other models	for other models see separate NX series datasheet



# COMPETENCE WHEREVER YOU ARE

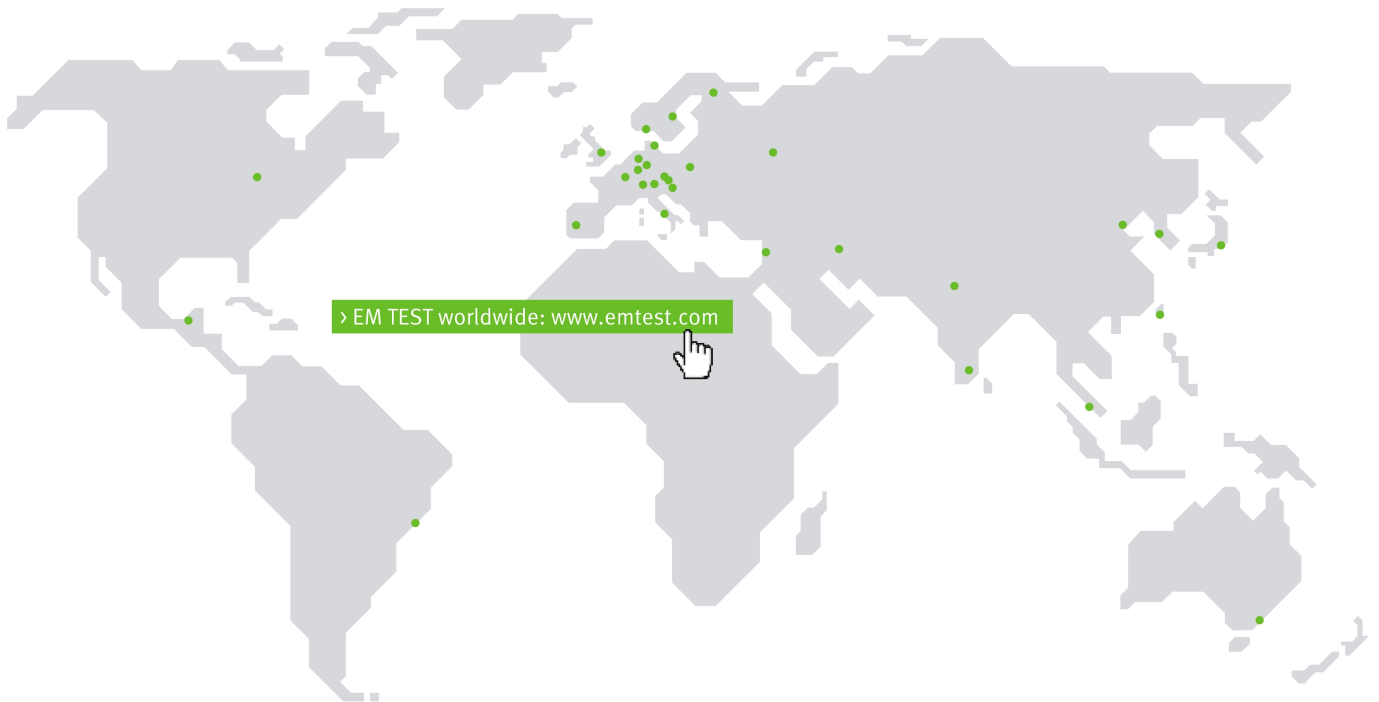

## CONTACT EM TEST DIRECTLY

### Switzerland

AMETEK CTS GmbH > Sternenhofstraße 15 > 4153 Reinach > Switzerland  
 Phone +41 (0)61 204 41 11 > Fax +41 (0)61 204 41 00  
 Internet: [www.ametek-cts.com](http://www.ametek-cts.com) > E-mail: [sales.conducted.cts@ametek.com](mailto:sales.conducted.cts@ametek.com)

### Germany

AMETEK CTS Europe GmbH > Customer Care Center EMEA > Lünener Straße 211  
 > 59174 Kamen > Germany  
 Phone +49 (0) 2307 26070-0 > Fax +49 (0) 2307 17050  
 Internet: [www.ametek-cts.com](http://www.ametek-cts.com) > E-mail: [info.cts.de@ametek.com](mailto:info.cts.de@ametek.com)

### Poland

AMETEK CTS Europe GmbH > Biuro w Polsce > ul. Twarda 44 > 00-831 Warsaw > Poland  
 Phone +48 (0) 518 643 12  
 Internet: [www.ametek-cts.com](http://www.ametek-cts.com) > E-mail: [Infopolska.cts@ametek.com](mailto:Infopolska.cts@ametek.com)

### USA / Canada

AMETEK CTS US > 52 Mayfield Ave > Edison > NJ 08837 > USA  
 Phone +1 732 417 0501  
 Internet: [www.ametek-cts.com](http://www.ametek-cts.com) > E-mail: [usasales.cts@ametek.com](mailto:usasales.cts@ametek.com)

### P.R. China

E & S Test Technology Limited > Rm 913, Leftbank >  
 No. 68 Bei Si Huan Xi Lu > Haidian District > Beijing 100080 > P.R. China  
 Phone +86 (0)10 82 67 60 27 > Fax +86 (0)10 82 67 62 38  
 Internet: [www.emtest.com](http://www.emtest.com) > E-mail: [info@emtest.com.cn](mailto:info@emtest.com.cn)

### Republic of Korea

EM TEST Korea Limited > #405 > WooYeon Plaza > #986-8 > YoungDeok-dong >  
 Giheung-gu > Yongin-si > Gyeonggi-do > Korea  
 Phone +82 (31) 216 8616 > Fax +82 (31) 216 8616  
 Internet: [www.emtest.co.kr](http://www.emtest.co.kr) > E-mail: [sales@emtest.co.kr](mailto:sales@emtest.co.kr)

### Singapore

AMETEK Singapore Pte. Ltd > No. 43 Changi South Avenue 2 > 04-01 Singapore  
 48164  
 Internet: [www.ametek-cts.com](http://www.ametek-cts.com) > E-mail: [singaporesales.cts@ametek.com](mailto:singaporesales.cts@ametek.com)

### Great Britain

AMETEK GB > 5 Ashville Way > Molly Millars Lane > Wokingham > Berkshire  
 RG41 2 PL > Great Britain  
 Phone +44 845 074 0660  
 Internet: [www.ametek-cts.com](http://www.ametek-cts.com)

Information about scope of delivery, visual design and technical data correspond with the state of development at time of release. Subject to change without further notice.