

# PRODUCT DATA

## LDS V964 Shaker Metric

### Performance Parameters\*

Armature Diameter	432 mm
Sine Force (peak)	89 kN
Random Force (rms)†	89 kN
Maximum ½-sine Shock Force‡	186.9 kN
Armature Resonance (f <sub>n</sub> )	2.25 kHz
Usable Frequency Range	5 Hz – 2.5 kHz
Mass of Moving Element (flush inserts)	59 kg
Velocity (sine peak) – full-field	2 m/s
Acceleration (sine peak)	100 g
Acceleration (random rms)	70 g
Displacement (pk-pk) – continuous	38 mm
LDS Amplifier	DPA-K range

### Characteristics

Suspension Axial Stiffness	61.3 N/mm
Suspension Rotational Stiffness	565 kN m/rad
Suspension Cross-axial Stiffness	21 kN/mm
Internal Load Support Capacity	907 kg
Shaker Body Mass (M <sub>b</sub> )	2820 kg
Stray Magnetic Field‡	<0.9 mT
Low Gauss Option	<0.6 mT
Compressed Air Supply	6.9 bar
Max. Required Input, Amplifier	244.59 kVA
Max. Required Input, FPS and CU	70.26 kVA

Used where large payloads need high performance vibration or shock testing, the V900 series gives engineers the confidence they need to develop highly reliable products. These systems have been used in single and multi-shaker configurations, and have been used to test products such as satellites and missiles.

### Features

- Combination of high performance armature design and water-cooled coils deliver excellent acceleration and velocity performance
- Automatic armature and body position load compensation system ensures larger loads can be comfortably accommodated
- Trunnions feature Lin-E-Air suspension system as standard. Solid trunnions available upon request

### Industry Applications

- 3-axis testing of complete satellite systems
- Avionics and military hardware testing
- Structural dynamics testing
- Clean room environments
- Multi-shaker, multi-axis applications

### System Performance

	with DPA 40/70 K -TC	with DPA 50/70 K -TC	with DPA 70 K -DC	with DPA 70 K -TC	with DPA 90/140 K -TC	with DPA 100/140 K -TC	with DPA 110/140 K -DC	with DPA 130/140 K -DC
<b>Sine Force (peak)</b>	60.1 kN	64.5 kN	48.9 kN	75.6 kN	80.1 kN	89 kN	80.1 kN	89 kN
<b>Max. Acceleration (sine peak)</b>	80 g	90 g	88 g	100 g	100 g	100 g	100 g	100 g
<b>Random Force (rms)</b>	48.9 kN	53.4 kN	54.5 kN	64.5 kN	68.9 kN	80.1 kN	80.1 kN	89 kN
<b>Max. Acceleration (random rms)</b>	70 g	70 g	70 g	70 g	70 g	70 g	70 g	70 g
<b>Velocity (sine peak)</b>	1.2 m/s	1.4 m/s	2.0 m/s	1.7 m/s	2.0 m/s	2.0 m/s	2.0 m/s	2.0 m/s

### Health and Safety

Complies with the following EU directives: Machinery 2006/42/EC, Low Voltage 2006/95/EC, EMC 2004/108/EC  
Designed in accordance with EN 61010-1:2001



110021


\* Force and velocity ratings depend on the amplifier driving the shaker. The sine force, random force and velocity parameters detailed here are based on the shaker when driven by the DPA 140 K amplifier.

† Random and shock ratings assume a payload approximately twice the mass of the armature; shock pulse 2 ms. For advice on specific test requirements, contact Brüel & Kjær.

‡ Theoretical maximum, measured 150 mm above table, full-field, at normal operating temperature.

Some of the features listed are available as standard, others as options. Please contact Brüel & Kjær for advice on the optimum specification to meet your system needs

### DPA-K Series Amplifier Characteristics

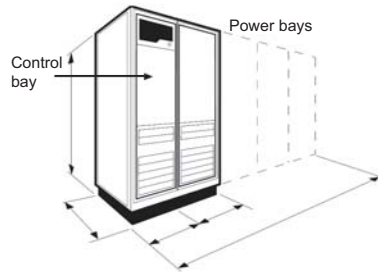

see table for dimensions

110022

Power Range	40 – 140 kVA in 8 kVA increments
Signal-to-noise Ratio	>65 dB, relative to 100 V rms output, 10 kΩ input termination and rated resistive load connected (100 kHz BW)
Input Impedance	10 kΩ nominal
Total Harmonic Distortion	0.5 – 0.8% at rated output into resistive load
Input Sensitivity (400 Hz, Master Gain fully CW)	1.1 V (±0.1 V rms input) for 100 V rms output at rated sinusoidal Volt Amp output
Switching Frequency	150 kHz
Module Efficiency	90.9%
Nominal Sine Output Voltage	100 V rms at rated power output
Frequency Range	20 Hz – 3 kHz
Frequency Response	20 Hz – 3 kHz: ±1.5 dB
Common Mode Rejection	100 dB (d.c. – 5 kHz)
Protection	Integral protection to prevent output devices from working outside their specification limits

© Brüel & Kjær. All rights reserved.

### Environmental Data\*

	V964 Shaker	DPA-K Amplifier						FPS and Cooling Unit
		40/70K	50/70K	70K	90/140K	100/140K	130/140K	
Working Ambient Temp. (°C)	4.5 to 30	5 to 40						5 to 40
Heat Dissipation (Rejected to Air)	4 kW	4.31 kW	5.35 kW	7.52 kW	9.41 kW	10.45 kW	13.79 kW	2.76 kW
Acoustic Noise at 2 m	105 dBA	82 dBA			85 dBA			68 dBA
Cooling Air Flow	–	1.65 m <sup>3</sup> /s			3.30 m <sup>3</sup> /s			0.66 m <sup>3</sup> /s
Raw Water Flow Rate	–	78 l/min <sup>†</sup>		79 l/min <sup>†</sup>	81 l/min <sup>†</sup>		88 l/min <sup>‡</sup>	
Raw Water Pressure Drop	–	0.35 bar <sup>†</sup>		0.36 bar <sup>†</sup>	0.38 bar <sup>†</sup>		0.4 bar <sup>‡</sup>	
Raw Water Max. Inlet Temp. (°C)	–	32 <sup>*</sup>						32 <sup>‡</sup>
Raw Water Max. Outlet Temp. (°C)	–	46 <sup>†</sup>		46 <sup>†</sup>	47 <sup>†</sup>		48 <sup>‡</sup>	
Height (mm)	1386	1905				1905		
Width (mm)	1711	1049			1560			1500
Depth (mm)	1030	825						
Mass (kg)	4200	774	793	831	1405	1424	1481	718

\* Values for air trunnion mounted shaker and an amplifier configuration of one control bay and one power bay  
<sup>†</sup> Actual values when used with V964 shaker  
<sup>‡</sup> Values for cooling unit alone when running at maximum capacity

### Make Our Experience Your Advantage

From application engineering, installation and training through to maintenance, spares and repairs, Brüel & Kjær offers a total service approach to keep your system operating efficiently and reliably. All LDS systems (standards and specials) are designed and manufactured to ISO 9001 standard. Brüel & Kjær offers a comprehensive range of vibration, measurement and analysis equipment. Please consult our website for details.

### V 964 Shaker Options

Armature Insert Selection:	
M 8	◆
3/8" UNC	◆
3/8" UNF	◆
M 10	◆
Mounting Selection:	
Trunnion mounted with Lin-E-Air isolation and body rotation gearbox	◆
Solid trunnion	●
Other Options:	
Combination shaker/slip table base	●
Chamber support kit	●
Thermal barrier	●
<b>Key:</b>	
◆ Standard – Available on shortest delivery	
● Option – Stocked item, available on short delivery	

Brüel & Kjær reserves the right to change specifications and accessories without notice. BP 2410 – 12 2012-08

